


@-style pro

Slim wall axial fans Ultra slim style



MODELS	PROTECTION	m ³ /h	l/s	dB(A)*	Pa	W
E-Style PRO 90	IPX4	80	22	30,1	23	10
E-Style PRO 100	IPX4	95	26	31,4	40	14
E-Style PRO 120	IPX4	165	46	36,7	54	15
E-Style PRO 150	IPX4	295	82	43,9	71	25

*Lp(A) measured at 3m in open field 230V-50Hz.

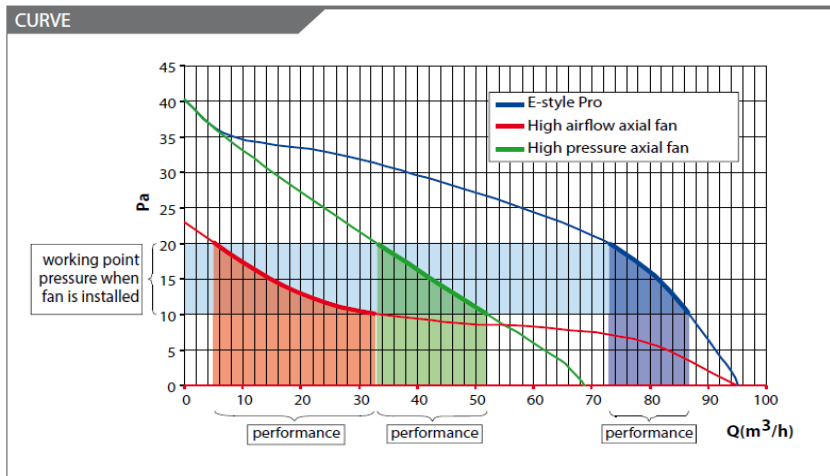

- Provided with back draught shutters on models 100, 120, 150
- Neon running light
- Style, technology
- PIR Version with miniaturized sensor

VERSIONS


- Standard
- Timer
- Comfortimer
- MHT humidity control
- MHY Smart humidity control
- PI.R. with infra-red sensor
- SELV version (12V a.c.)
- 2 speed

ACCESSORY



DIMENSIONS

MODELS	A	B	C	D	ØE	Kg
E-Style PRO 90	160	160	81	17	92,5	0,4
E-Style PRO 100	160	160	95	17	98,2	0,4
E-Style PRO 120	180	180	101	18	119	0,6
E-Style PRO 150	200	200	119	22	149	1,0




@-style trend

Slim wall axial fans Ultra slim style



MODELS	PROTECTION	m ³ /h	l/s	dB(A)*	Pa	W
E-Style 100 TREND	IPX4	85	24	26,4	32	11
E-Style 120 TREND	IPX4	165	46	36,7	54	15
E-Style 150 TREND	IPX4	295	82	43,9	71	25

*Lp(A) measured at 3m in open field 230V-50Hz.

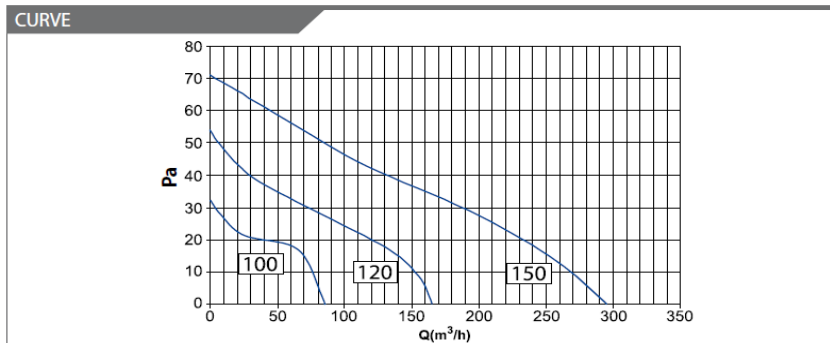

- Basic version of e-style pro (no neon running light - back draught shutters upon request)
- Complete range and high aerualic performances.

VERSIONS

- Standard
- Timer
- MHT humidity control

DIMENSIONS

MODELS	A	B	C	D	ØE	Kg
E-Style 100 TREND	160	160	95	17	98,2	0,45
E-Style 120 TREND	180	180	101	18	119	0,66
E-Style 150 TREND	200	200	119	22	149	1,04

